


SERIES - MI-V-FF

FLANGE BASE FIXED HOLD DOWN ARM

Supplied with Spindle assemblies . Clamp runs with specially designed pre-lubricated bushes for long life cycle.
Silicon rubber grip having large grip surface with oil & heat resistance.

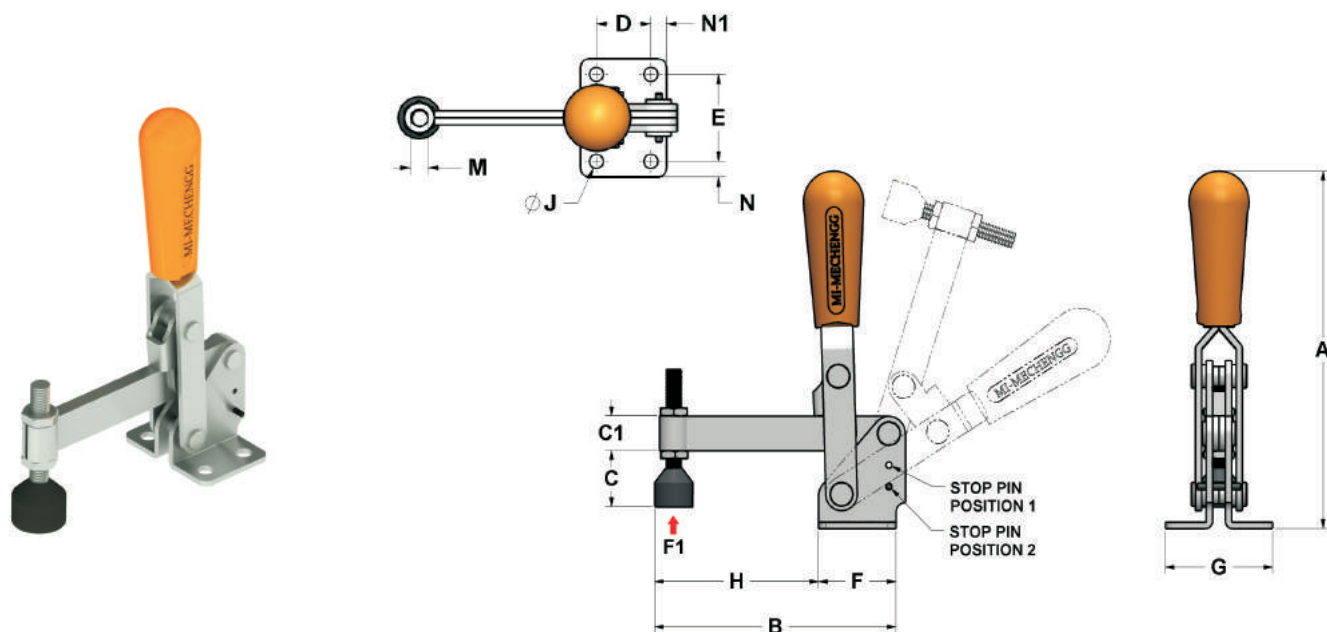

- **Material** : Steel
- **Surface Finish** : Electro Zinc - Plated
- **Hand Grip** : Silicon Rubber
- **Clamping Bolt** : 8.8 Grade Moulded with NBR

PART NO	ARM OPENS AT PIN 1	HANDLE MOVES AT PIN 1	ARM OPENS AT PIN 2	HANDLE MOVES AT PIN 2	HOLDING CAPACITY F1 (N)	APPROX (Kg's)	SPINDLE SUPPLIED (METRIC) PART NO
MI-V-50-FF	89°	60°	-	-	0230	0.85	NTS-V50
MI-V-100-FF	81°	56°	-	-	0420	0.170	NTS-V100
MI-V-150-FF	46°	46°	112°	70°	0750	0.400	NTS-V150
MI-V-250-FF	85°	55°	135°	72°	1250	0.660	NTS-V250
MI-V-350-FF	50°	40°	108°	60°	1780	0.950	NTS-V350
MI-V-450-FF	60°	52°	125°	77°	2250	1.240	NTS-V450

Note : For Spindle dimensions refer accessories page

PART NO	A	B	C	C1	D	E	F	G	H	J	M	N	N1
MI-V-50-FF	85	57.9	15.6	9	15	24	25	34	32.9	4.5	M5	5	5
MI-V-100-FF	119	74	24	10	14	26	26	38	48	5	M6	6	6
MI-V-150-FF	158	108	35	16	19	38	36	51	72	7	M8	6.5	8.5
MI-V-250-FF	204	143	39	20	26	44	44	64	99	8.5	M10	10	9
MI-V-350-FF	218	153	48	21	31	50	49	68	104	8	M10	9	9
MI-V-450-FF	236	179	48	25	32	48	56	68	123	9	M12	10	12