SERIES - MI-V-SSB

STRAIGHT BASE SOLID HOLD DOWN BAR

These clamps have solid SQ shaped bar. This bar can be cut into any preferred size, it can be drilled in any preferred position or a clamping assembly can be welded to the bar as per the application. Clamp runs with specially designed pre-lubricated bushes for long life cycle. Silicon rubber grip having large grip surface with oil & heat resistance.

★ Spindle to be ordered separately

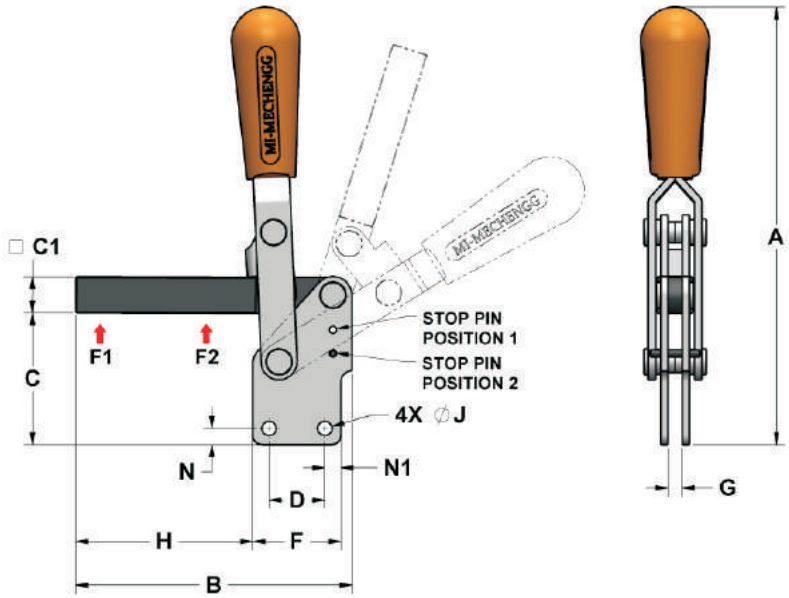

- **Material** : Steel
- **Surface Finish :** Electro Zinc - Plated
- **Hand Grip :** Silicon Rubber
- **Clamping Bolt :** 8.8 Grade Moulded with NBR

PART NO	ARM OPENS AT PIN 1	HANDLE MOVES AT PIN 1	ARM OPENS AT PIN 2	HANDLE MOVES AT PIN 2	HOLDING F1 (N) ↑	CAPACITY F2 (N) ↑	APPROX ⚖ (Kg's)	SPINDLE (optional) (METRIC) PART NO
MI-V-100-SSB	82°	57°	–	–	600	1500	0.190	NTS-V100
MI-V-150-SSB	46°	46°	112°	70°	1000	2500	0.460	NTS-V150
MI-V-350-SSB	50°	40°	108°	60°	1980	4500	1.125	NTS-V350
MI-V-450-SSB	60°	52°	125°	77°	2950	5500	1.515	NTS-V450

Note : For Spindle dimensions refer accessories page

PART NO	A	B	C	C1	D	F	G	H	J	N	N1
MI-V-100-SSB	126	80	36	10	14	26	6	54	5	6	6
MI-V-150-SSB	176	113	55	16	19	36	6	71	7	6.5	8.5
MI-V-350-SSB	243	153.5	73	20	31	49	8	98.5	8	9	9
MI-V-450-SSB	260	183	73.8	22	32	56	10	122	9	10	12