


## SERIES - MI-V-FSB

### FLANGE BASE SOLID HOLD DOWN BAR

These clamps have solid SQ shaped bar. This bar can be cut into any preferred size, it can be drilled in any preferred position or a clamping assembly can be welded to the bar as per the application. Clamp runs with specially designed pre-lubricated bushes for long life cycle. Silicon rubber grip having large grip surface with oil & heat resistance.

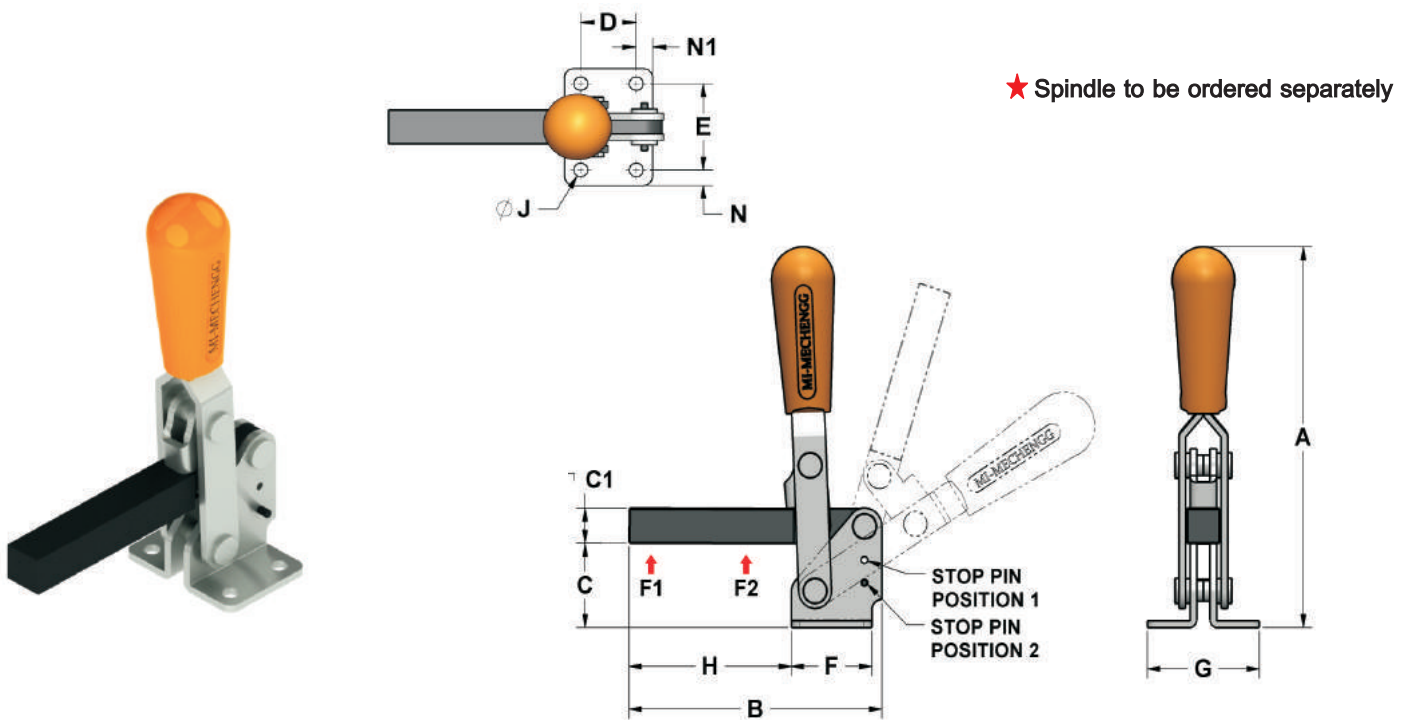

- **Material** : Steel
- **Surface Finish** : Electro Zinc - Plated
- **Hand Grip** : Silicon Rubber
- **Clamping Bolt** : 8.8 Grade Moulded with NBR

PART NO	ARM OPENS AT PIN 1	HANDLE MOVES AT PIN 1	ARM OPENS AT PIN 2	HANDLE MOVES AT PIN 2	HOLDING F1 (N)	CAPACITY F2 (N)	APPROX $\frac{\Delta}{\Delta}$ (Kg's)	SPINDLE (optional) (METRIC) PART NO
MI-V-100-FSB	81°	56°	-	-	600	1500	0.190	NTS-V100
MI-V-150-FSB	46°	46°	112°	70°	1000	2500	0.460	NTS-V150
MI-V-350-FSB	50°	40°	108°	60°	1980	4500	1.125	NTS-V350
MI-V-450-FSB	60°	52°	125°	78°	2950	5500	1.515	NTS-V450

**Note :** For Spindle dimensions refer accessories page

PART NO	A	B	C	C1	D	E	F	G	H	J	N	N1
MI-V-100-FSB	114	80	24	10	14	26	26	38	54	5	6	6
MI-V-150-FSB	158	107	36	16	19	38	36	51	71	7	6.5	8.5
MI-V-350-FSB	218	153.5	48	20	31	50	49	68	98.5	8	9	9
MI-V-450-FSB	236	183	50	22	32	48	56	68	122	9	10	12