


## SERIES - MI-V-FS

### FLANGE BASE SOLID HOLD DOWN ARM

Supplied with Spindle assemblies & Spindle retainer. Clamp runs with specially designed pre-lubricated bushes for long life cycle. Silicon rubber grip having large grip surface with oil & heat resistance. Spindle retainer supplied loose for welding in the desired position.

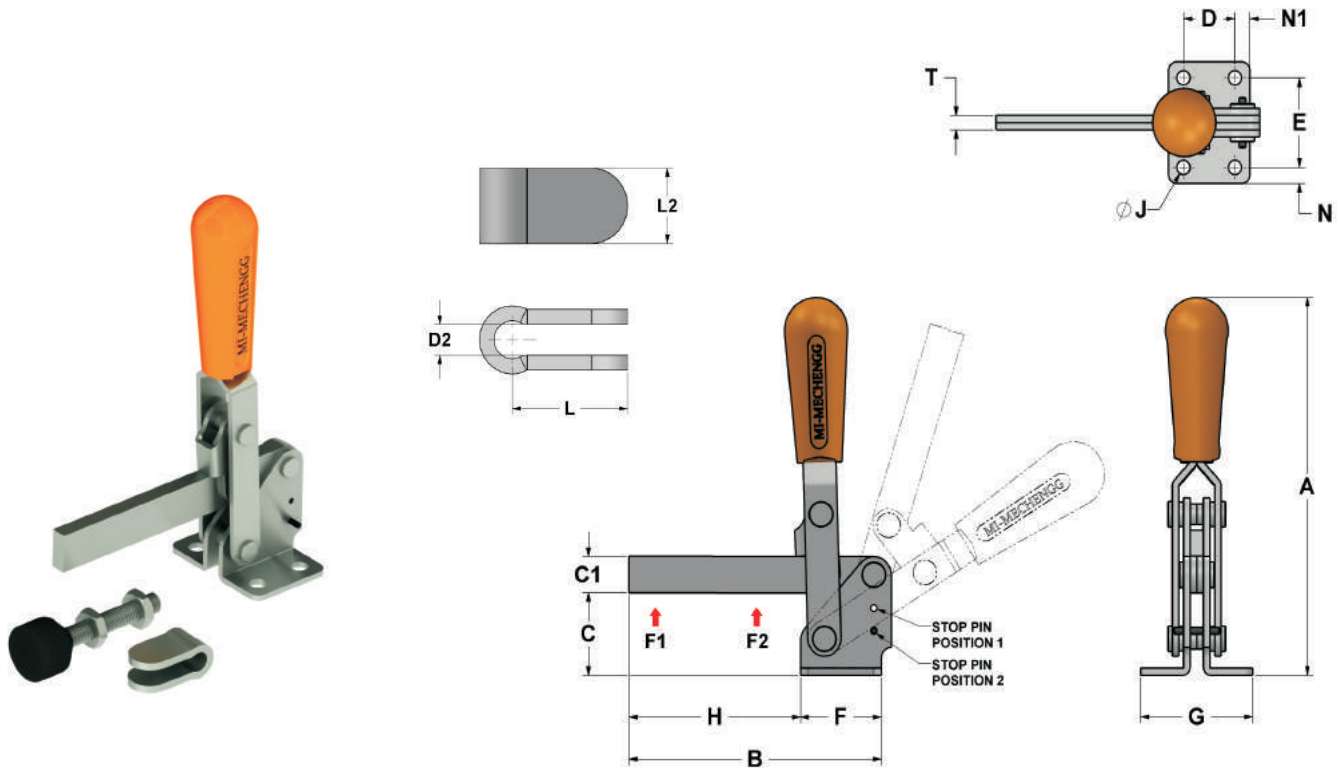

- Material : Steel
- Surface Finish : Electro Zinc - Plated
- Hand Grip : Silicon Rubber
- Clamping Bolt : 8.8 Grade Moulded with NBR

PART NO	ARM OPENS AT PIN 1	HANDLE MOVES AT PIN 1	ARM OPENS AT PIN 2	HANDLE MOVES AT PIN 2	HOLDING CAPACITY F1 (N)	F2 (N)	APPROX $\Delta\Delta$ (Kg's)	SPINDLE (METRIC) PART NO	SPINDLE RETAINER PART NO
MI-V-150-FS	55°	50°	120°	72°	0750	2000	0.415	NTS-V150	SRV-150
MI-V-250-FS	85°	55°	135°	72°	1250	3000	0.680	NTS-V250	SRV-250
MI-V-350-FS	50°	40°	108°	60°	1780	4000	0.975	NTS-V350	SRV-350
MI-V-450-FS	60°	52°	125°	77°	2250	5000	1.275	NTS-V450	SRV-450

**Note :** For Spindle & Spindle Retainer dimensions refer accessories page

PART NO	A	B	C	C1	D	E	F	G	H	J	N	N1	T
MI-V-150-FS	157	108	35	16	19	38	36	51	72	7	6.5	8.5	6
MI-V-250-FS	204	141	39	20	26	44	44	64	97	8.5	10	9	8
MI-V-350-FS	218	153	48	21	31	50	49	68	104	8	9	9	8
MI-V-450-FS	236	178	48	25	32	48	56	68	122	9	10	12	10