


SERIES - MI-V-SCF

STRAIGHT BASE COMPACT FIXED HOLD DOWN ARM

Supplied with Spindle assemblies. Clamp runs with specially designed pre-lubricated bushes for long life cycle.
Silicon rubber grip having large grip surface with oil & heat resistance.

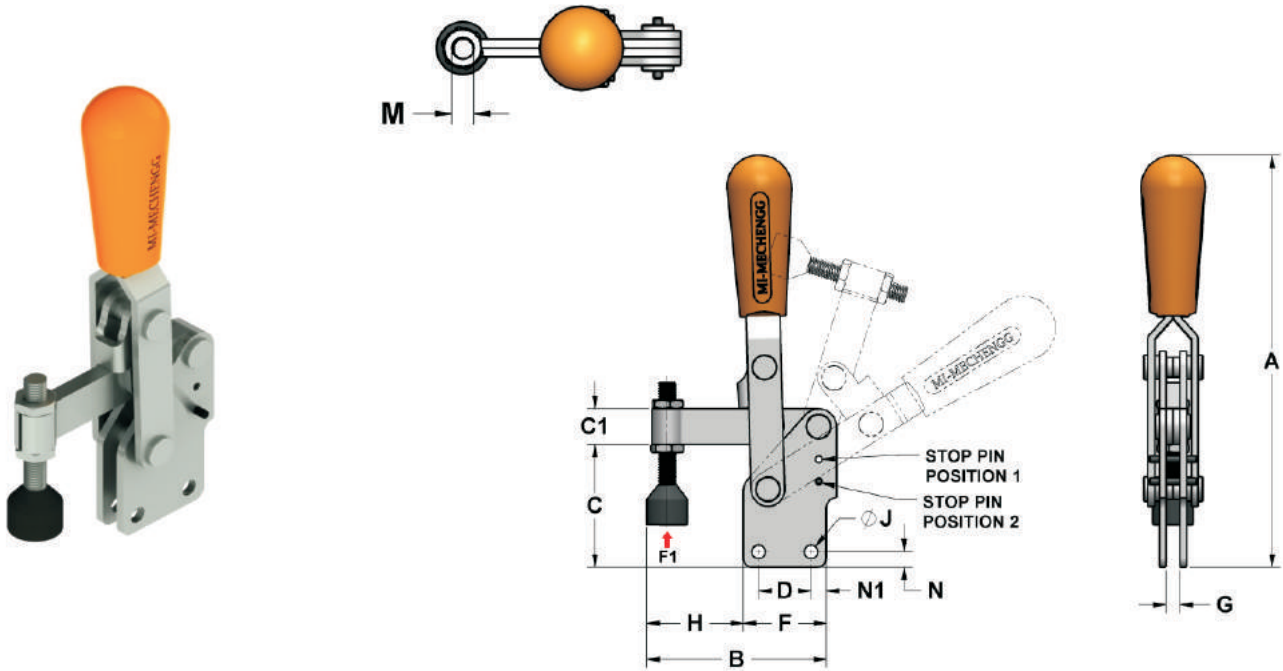

- **Material** : Steel
- **Surface Finish** : Electro Zinc - Plated
- **Hand Grip** : Silicon Rubber
- **Clamping Bolt** : 8.8 Grade Moulded with NBR

PART NO	ARM OPENS AT PIN 1	HANDLE MOVES AT PIN 1	ARM OPENS AT PIN 2	HANDLE MOVES AT PIN 2	HOLDING CAPACITY F1 (N)	APPROX \triangle (Kg's)	SPINDLE SUPPLIED (METRIC) PART NO
MI-V-100-SCF	81°	57°	-	-	800	0.160	NTS-V100
MI-V-150-SCF	55°	50°	118°	72°	1200	0.375	NTS-V150
MI-V-350-SCF	50°	41°	108°	60°	3000	0.900	NTS-V350

Note : For Spindle dimensions refer accessories page

PART NO	A	B	C	C1	D	F	G	H	J	M	N	N1
MI-V-100-SCF	131	56	36	10	14	26	6	30	5	M6	6	6
MI-V-150-SCF	176	77	54	16	19	36	6	41	7	M8	6.5	8.5
MI-V-350-SCF	243	106	73	21	31	49	8	57	8	M10	9	9